
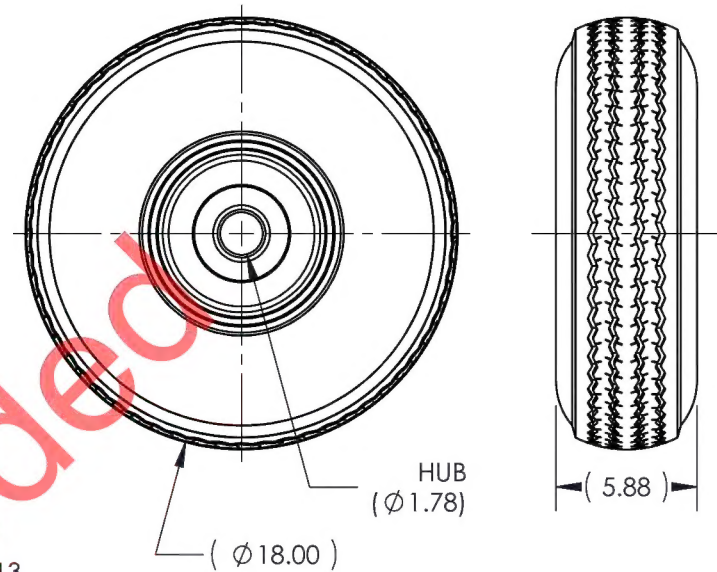


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

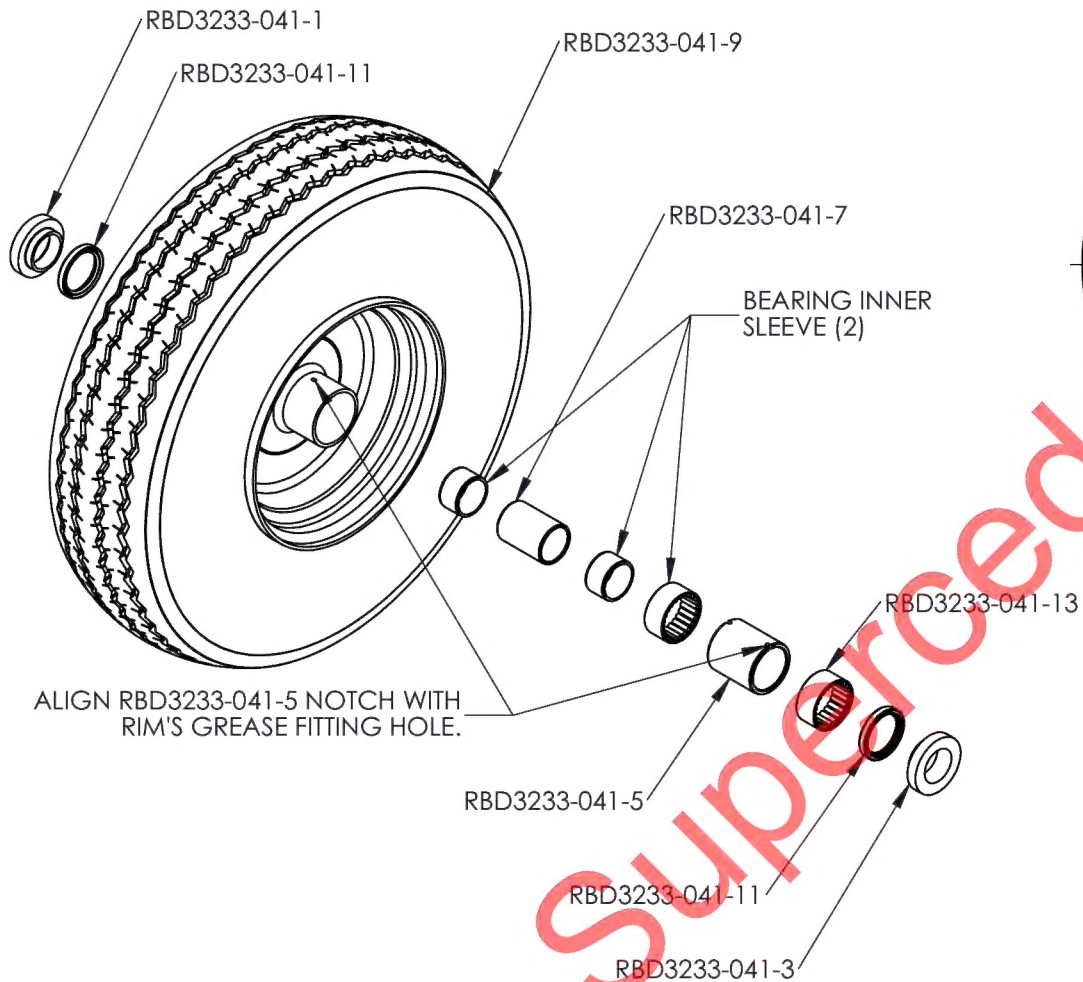

#### WHEEL SPECIFICATIONS

SIZE	MAXIMUM LOAD	MAXIMUM INFLATION LOAD
TIRE: 19.0 x 5.8 RIM: 5.70 x 8.0	910 LBS (RANGE C)	90 PSI*

\* MANUFACTURER'S RECOMENDATIONS ARE 75 PSI FOR HIGH SPEED USE.

NOTE 1. USED ON BELL MODELS 204,205,212,214, 412,UH1,222,230, & AH1

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description
			RBD3233-041-1	1	INSIDE WASHER
			RBD3233-041-3	1	OUTSIDE WASHER
			RBD3233-041-5	1	HUB SLEEVE
			RBD3233-041-7	1	SHAFT SLEEVE
		B/O	RBD3233-041-9	1	TIRE & WHEEL ASSY
		B/O	RBD3233-041-11	2	BEARING SEAL
		B/O	RBD3233-041-13	2	ROLLER BEARING



RED BARN MACHINE

#### TITLE GROUND HANDLING WHEELS

DWG NO. RBD412-729-011  
RBD3233-041

REV C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN BY: GILBERT	
TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1		APPROVED <i>D Weil</i>	
FRACTIONS ± 1/32 ANGLES ± 5°		HEAT TREAT FINISH	
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING		SPEC	
SCALE 1:8		USED ON MODEL	
DATE 3/16/2012		SEE NOTE 1	
		SHEET 1 OF 1	